

Dispositivo mobile trifase MT con lampade neon



Mobile MV three-phase voltage detector with neon lamps



- Rileva la presenza di tensione su quadri MT
- Utilizzabile congiuntamente al dispositivo fisso AA010036-2
- Consente l'accesso diretto alla fase tramite idonea strumentazione

- It detects the voltage presence on MT cabinets
- Operable together with AA010036-2 fixed type device
- It allows the direct access to the phase with proper instrument

DIMENSIONS

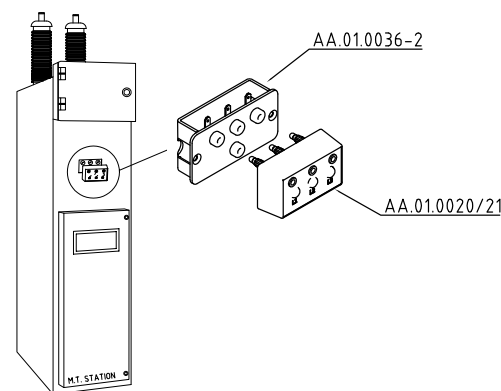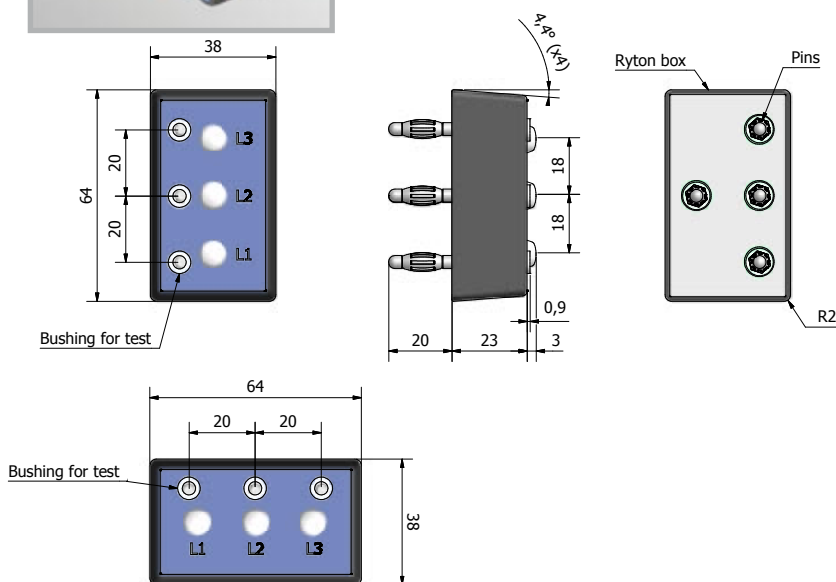

SPECIFICATIONS

CHARACTERISTICS	VALUE
Housing material:	ryton
Operating temperature:	- 20 °C ÷ + 80 °C;
Storage temperature:	- 30 °C ÷ + 85 °C;
Vibrations resistance:	1mm/80Hz (~4g); ref. EN 60068-2-6

CODES: AA010020 (horiz.); AA010021 (vert.)

Dispositivo mobile trifase MT con leds



Mobile MV three-phase voltage detector with leds



- Rileva la presenza di tensione su quadri MT
- Utilizzabile congiuntamente al dispositivo fisso AA010036-2
- Impiega led ad alta efficienza
- Consente l'accesso diretto alla fase tramite idonea strumentazione

- It detects the voltage presence on MT cabinets
- Operable together with AA010036-2 fixed type device
- It uses high efficiency leds
- It allows the direct access to the phase with proper instrument

DIMENSIONS

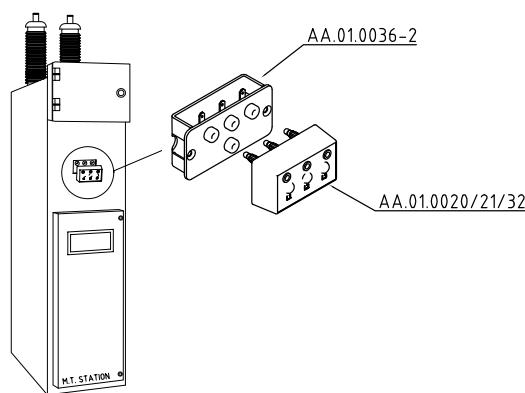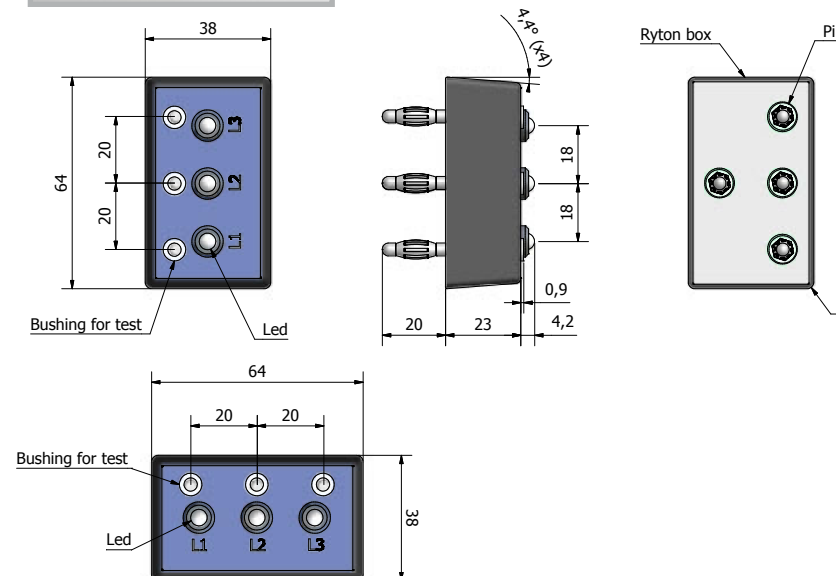

SPECIFICATIONS

CHARACTERISTICS	VALUE
Housing material:	ryton
Operating temperature:	- 20 °C ÷ + 80 °C;
Storage temperature:	- 30 °C ÷ + 85 °C;
Vibrations resistance:	1mm/80Hz (~4g); ref. EN 60068-2-6

CODES: AA010031 (horiz.); AA010032 (vert.)